

Eco Rapid LED Goldstar

ECO RAPID

A general purpose non-maintained emergency luminaire with D40 classification

FEATURES

- Suitable for all emergency lighting applications
- Energy efficient: 1W energy consumption
- Easy-to-install spring clips
- Large trim included
- D40 classification
- 50,000 hour LED life
- Supplied complete with flex and plug
- Designed in Australia

APPLICATIONS

- Commercial office
- Educational facilities
- Hospitality

TECHNICAL INFORMATION


- Type: SPU
- Battery pack: NiCd 4 x 1 Sub-C cells linear 4.8V 1.8Ah
- Operating Voltage: 240V a.c. +/- 6% 50Hz
- Power Consumption: 1W
- Body Constructions: Polycarbonate
- Operating Temperature: 10° to 40°
- IP Rating: IP20
- Compliance: AS/NZS 2293 AS/NZS 60598 



SPACING TABLE

	Maximum spacing between luminaires				
Metres	2.7	3	3.3	3.6	4
Classification					
D40	18.0	18.6	19.1	19.6	20.1

DIMENSIONS

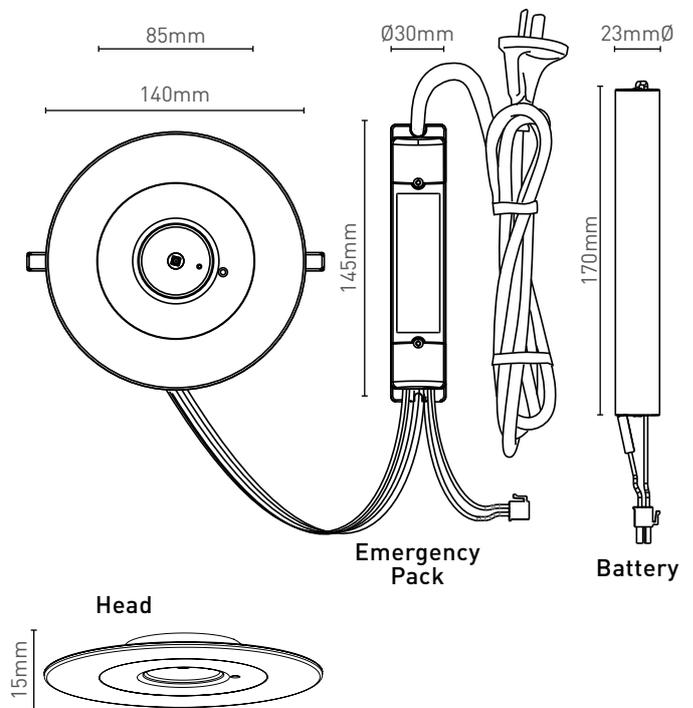

SPU	Description
F9975	ECO RAPID LED GOLDSTAR D40

Type	Dish diameter	Hole cut-out
No trim	80mmØ	70mmØ
Large trim	150mmØ	70mm - 125mmØ

More info available at:
www.famco.com.au

FAMCO LIGHTING PTY LTD

T: (03) 9935 7300 F: (03) 9935 7301 E: info@famco.com.au W: www.famco.com.au

© 2016 Famco Lighting Pty Ltd. All rights reserved. E&OE. Subject to change without notice, to allow progress in design. This document and the information it contains is the property and copyright of Famco Lighting Pty Ltd and must not be used, copied, transmitted or reproduced without our written permission.

