


Excelsior LED




LUMINAIRE DESIGNERS, MANUFACTURERS & SUPPLIERS

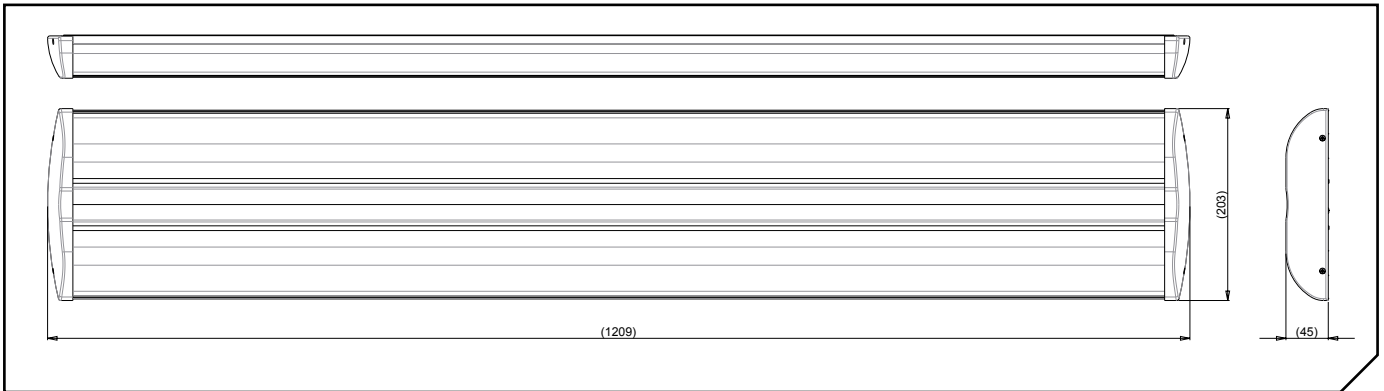


Specifications

All models	
Supply Voltage	230-240V a.c. 50Hz
Power Factor	> 0.95
Colour Temperature	4000K

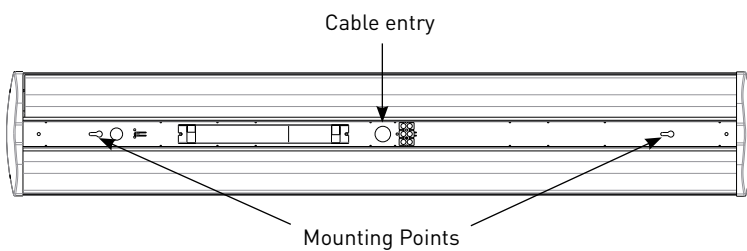


Installation

- Disconnect mains supply before installing, servicing or maintaining the luminaire
- Unscrew and remove endcap

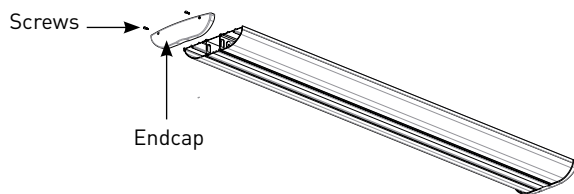

- Slide off centre panel to access cable entry, terminal block and mounting points

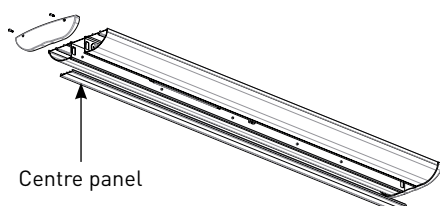

Installation

- Feed mains cable through cable entry point
- Fix luminaire to ceiling or wall and secure with suitable screws (not supplied)
- Connect electrical wiring
- For DALI models connect the data cable to the two terminals labelled "DA"
- Replace and secure the centre panel
- Replace the endcap and secure with screws (supplied)
- Models with built in PIR sensor will require commissioning on site, please contact Famco for more details

Disclaimers

This product must be installed and used as per these instructions.

- This product must be installed by a licenced electrician.
- This product is designed for indoor installations only.
- This product has been designed to minimise the effects of interference from off peak electricity signals. Interference in the form of light flicker is still possible in some cases depending on proximity to the signal injection point.
- Electrical installations periodically receive transient over voltages. This product has been designed to minimise the effect of such voltages on connected equipment. It may not give full protection for extreme over voltage transients such as those resulting from a close lighting strike.
- Famco reserves the right to modify the specifications of this product at any time.
- This product should only be cleaned with a damp cloth. Cleaning agents and solvents should not be used.
- This product must be cleaned periodically from dust and other contaminants.
- This product has no user serviceable part and no attempt should be made to repair this product.
- When the luminaire reaches its end of life it should be replaced.
- Severe electromagnetic interference from other products may cause malfunction of this product.
- This product is not suitable for marine environments such as areas subject to salt spray and/or mist.
- This product is not suitable for installation in hazardous and/or corrosive areas.
- The material in this product may vary slightly in colour from batch to batch. Colour matching from one batch to another cannot be guaranteed.
- This product has been designed to operate in ambient temperatures 0°C to 25°C
- This product has been designed to operate on a nominal supply voltage of 230 -6% to 240Va.c. +6%.
- Please be aware that LED light sources degrade over time. We recommend the LED source or fitting is replaced every 7 years.
- This product utilises intellectual property in the form of registered designs, trademarks, and/or patents. Such intellectual property remains the property of Famco in all cases.

Warranty

Famco Lighting Pty Ltd guarantees this lighting unit for a period of 5 years from date of despatch, solely against failure arising from faulty materials or workmanship, and provided that the unit has been stored, shipped, installed, used and maintained in accordance with the manufacturers instructions and relevant standards. Misuse, installations exceeding Ta 40°C for no more than 14 hours per day, negligence or modification of the unit voids all warranties. Consult Famco Lighting Pty Ltd Conditions of Sale for details on warranty liability. If this lighting unit is faulty, return the unit freight pre-paid to your point of purchase, or contact Famco Lighting Pty Ltd on +61 (03) 9935 7300.

Customer Service

For all Customer Service and Technical Support enquires please call Monday to Friday during business hours.

Famco Lighting PTY LTD
+61 (03) 9935 7300
www.famco.com.au

ABN: 22 091 160 440