


## Ceiling cut out template – recessed installation


Type	Diameter 'H' (mm)	Hole cut-out 'D' (mm)
Without Ring	60	52
Small Ring (included)	80	66
Medium Ring (included)	120	72
Square Ring	103 x 103	72
Large Ring (included)	150	72

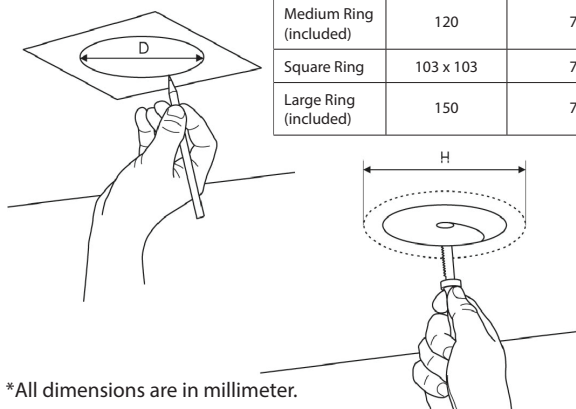


\*All dimensions are in millimeter.

## Mains supply connection – recessed installation


Supplied complete with flex and plug.

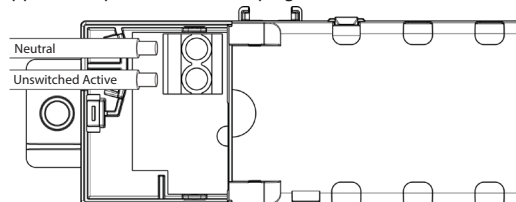


For DALI models, hard wiring required.

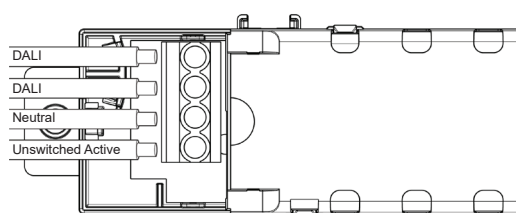


## Recessed installation

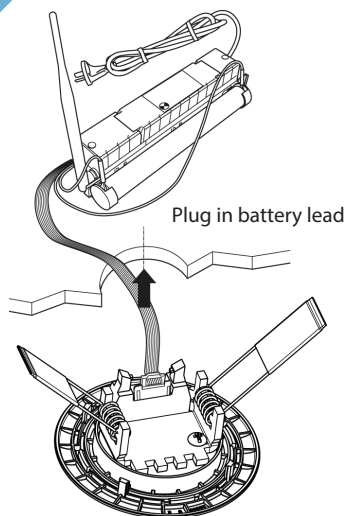

## Changing trim size for non asymmetric models

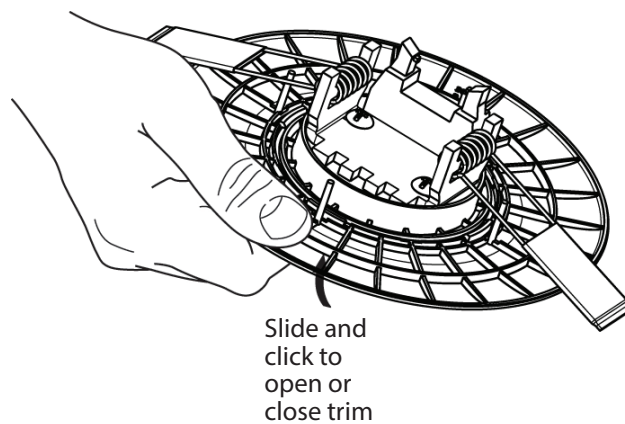


## Changing trim size for asymmetric models with square trim

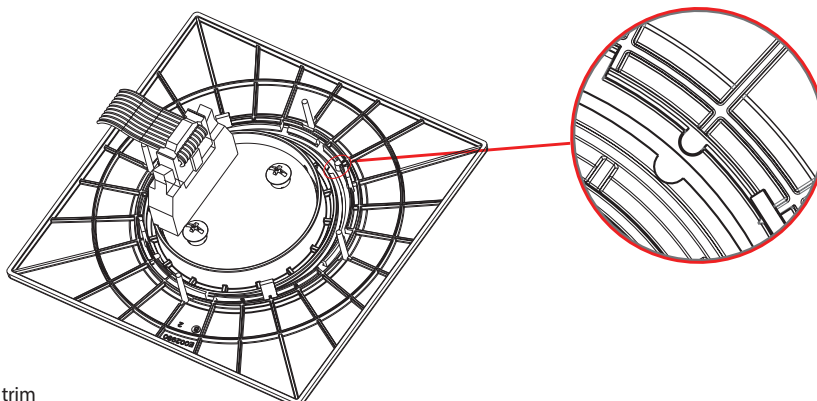

Ensure locators are in position prior to securing the square trim

## Asymmetric Goldstar

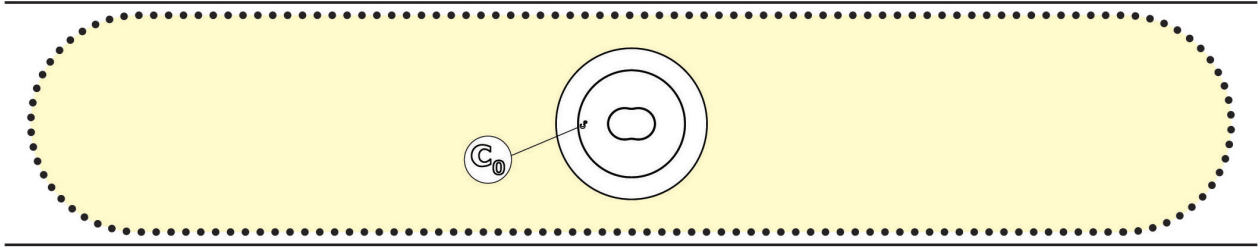


**NOTE:** Ensure the "C" symbol is parallel to the wall

## Minimum ceiling void



**NO INSULATION**




**Note:** Ensure emergency pack is above insulation

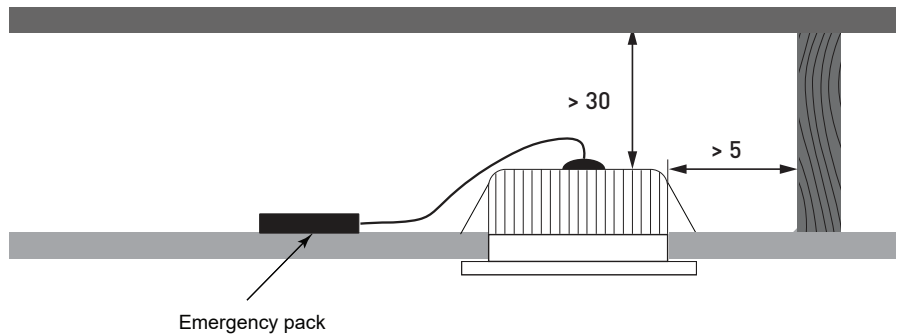

## Surface mount installation – Direct onto the ceiling using mounting holes shown below

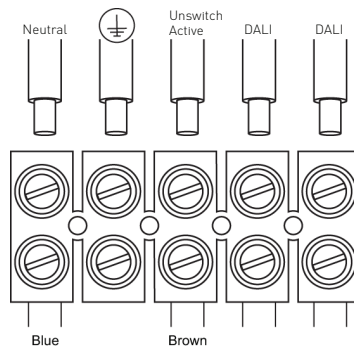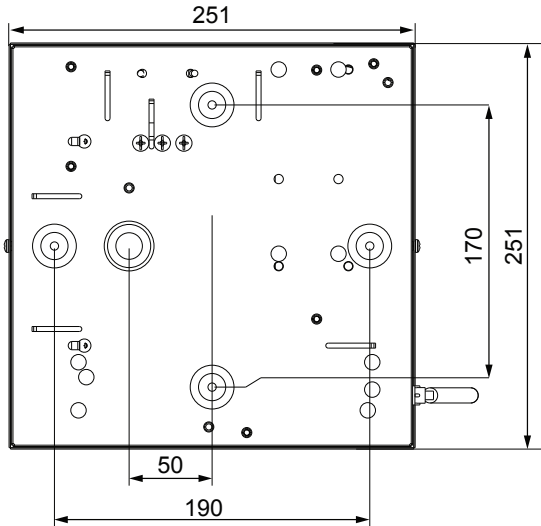

DALI terminal connection is applicable to DALI models only.

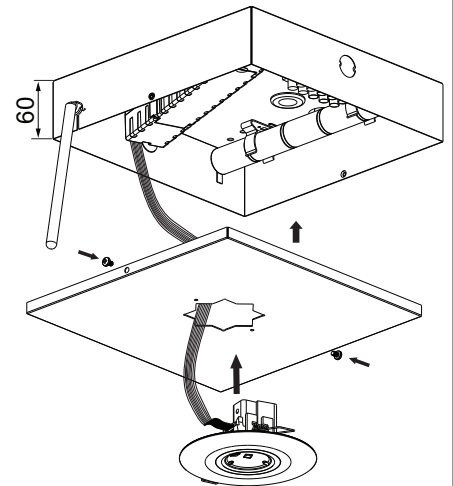

\*All dimensions are in millimeter.