

Eco Rapid LED Viking

ECO RAPID



A weatherproof LED luminaire designed for general purpose applications.

FEATURES

- Available in Mains, Emergency with and without integrated microwave on/off sensor.
- Emergency versions utilise Lithium battery technology with T-sense temperature sensing.
- Available in 2 foot, 4 foot or 5 foot lengths.
- Three lumen packages.
- Hinged diffuser for ease of maintenance.
- Quick release toggles for fast installation.
- Luminaire efficacy >90lm/W
- Polycarbonate body and diffuser
- 5 Year Warranty



APPLICATIONS


- Carparks
- Security areas
- Public amenity

TECHNICAL INFORMATION

- Colour temperature: 4,000K
- Chromaticity Tolerance: ANS1 ANSLG C78.377: 3985K \pm 275
- MacAdam Ellipse: 3SDCM
- CRI>80
- LED Light Source Life (LSL) up to 50,000 hrs L70 at ambient temperature up to 25°C.
- IK Rating: IK08
- IP Rating: IP65
- Construction: Polycarbonate (body)
Opal (diffuser)
- Stainless steel toggle clips 304 grade.
- Compliance: AS/NZS 60598.1 and CISPR15



DIMENSIONS

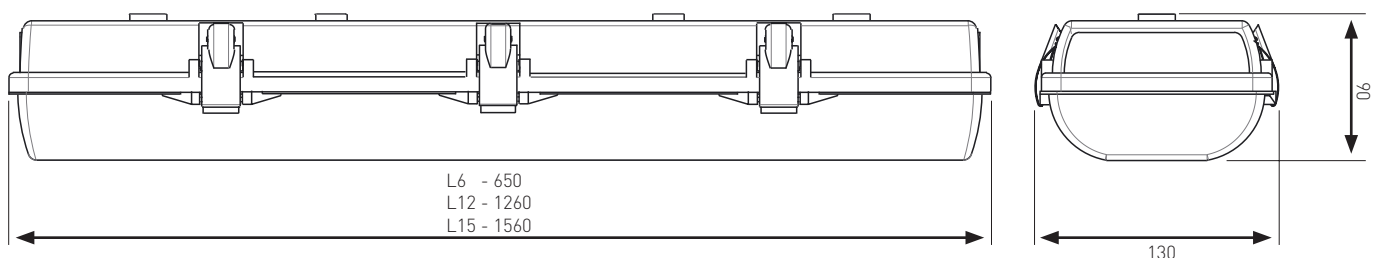

Note: All dimensions are in mm.

Eco Rapid LED Viking

ECO RAPID



Cat. No	Description	WATTAGE/LUMENS	C ₀	C ₉₀
MAINS				
FL9883	ECO RAPID VIKING 2FT MAINS	23W/2,100LM	-	-
FL9884	ECO RAPID VIKING 4FT MAINS	49W/4,600LM	-	-
FL9885	ECO RAPID VIKING 5FT MAINS	56W/5,700LM	-	-
FL9883D	ECO RAPID VIKING 2FT MAINS DALI	23W/2,100LM	-	-
FL9884D	ECO RAPID VIKING 4FT MAINS DALI	49W/4,600LM	-	-
FL9885D	ECO RAPID VIKING 5FT MAINS DALI	56W/5,700LM	-	-
FL9883Q	ECO RAPID VIKING 2FT MAINS WITH MICROWAVE ON/OFF SENSOR	23W/2,100LM	-	-
FL9884Q	ECO RAPID VIKING 4FT MAINS WITH MICROWAVE ON/OFF SENSOR	49W/4,600LM	-	-
FL9885Q	ECO RAPID VIKING 5FT MAINS WITH MICROWAVE ON/OFF SENSOR	56W/5,700LM	-	-
STANDALONE EMERGENCY				
FL9983/LI	ECO RAPID VIKING 2FT MAINTAINED LITHIUM	26W/2,100LM	D63	C125
FL9984/LI	ECO RAPID VIKING 4FT MAINTAINED LITHIUM	56W/4,600LM	D160	D100
FL9985/LI	ECO RAPID VIKING 5FT MAINTAINED LITHIUM	66W/5,700LM	D250	D125
FL9983Q/LI	ECO RAPID VIKING 2FT MAINTAINED LITHIUM WITH MICROWAVE ON/OFF SENSOR	23W/2,100LM	D63	C125
FL9984Q/LI	ECO RAPID VIKING 4FT MAINTAINED LITHIUM WITH MICROWAVE ON/OFF SENSOR	49W/4,600LM	D160	D100
FL9985Q/LI	ECO RAPID VIKING 5FT MAINTAINED LITHIUM WITH MICROWAVE ON/OFF SENSOR	56W/5,700LM	D250	D125
MASTERMINDER				
FLX9983/LI	ECO RAPID VIKING 2FT MAINTAINED LITHIUM	26W/2,100LM	D63	C125
FLX9984/LI	ECO RAPID VIKING 4FT MAINTAINED LITHIUM	56W/4,600LM	D160	D100
FLX9985/LI	ECO RAPID VIKING 5FT MAINTAINED LITHIUM	66W/5,700LM	D250	D125
FLX9983Q/LI	ECO RAPID VIKING 2FT MAINTAINED LITHIUM WITH MICROWAVE ON/OFF SENSOR	23W/2,100LM	D63	C125
FLX9984Q/LI	ECO RAPID VIKING 4FT MAINTAINED LITHIUM WITH MICROWAVE ON/OFF SENSOR	49W/4,600LM	D160	D100
FLX9985Q/LI	ECO RAPID VIKING 5FT MAINTAINED LITHIUM WITH MICROWAVE ON/OFF SENSOR	56W/5,700LM	D250	D125

