


Weatherproof LED Exit Sign

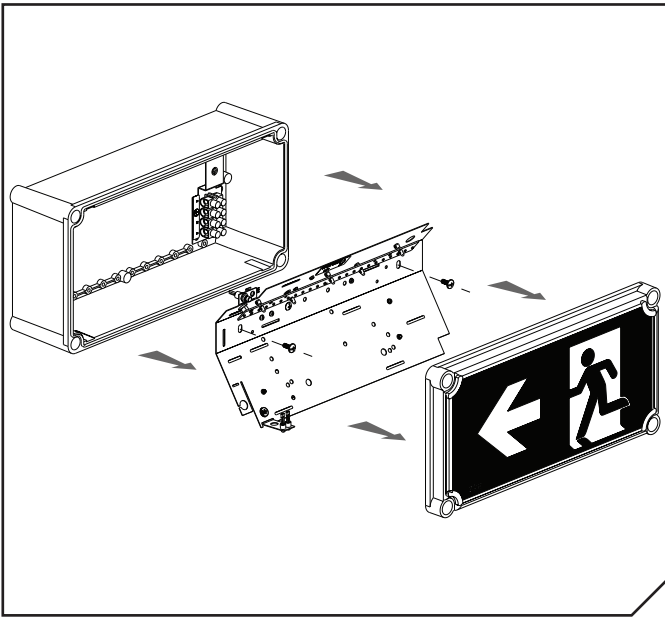

Mounting holes for direct wall mounting

	A	B
24m MODELS	355mm	165mm
32m MODELS	535mm	254mm

Mains supply connection

Note:

1. This sign is configured for maintained operation only.
2. For DALI models, connect the two DALI wires to the DALI terminals.
3. To maintain the IP rating of the product, the supplied cable gland must be used. Drill a 20 mm hole in the desired location on the body, and use 10 mm (3-core) circular cable.

Test switch

The test switch on this product is a magnetic type so that the weatherproof seal does not have to be opened. To perform a manual test, hold a magnet against the product surface near the "Magnetic Test Switch" label.

24m - side bracket (F9937/SBKT)

24m - ceiling bracket (F9937/CBKT)

24m- wall bracket (F9937/WBKT) also available.