

Jumbo LED Exit Signs



APPLICATIONS



- Warehouse
- Distribution centres
- Shopping malls
- Exhibition halls
- Sporting venues
- Airports
- Industrial

FEATURES

- T-sense™ temperature sensing technology for the Li-ion battery.
- Electronics designed to lengthen the life of the battery, minimising maintenance costs.
- Environment friendly battery.
- Ceiling Mounted.
- Robust construction.
- 3 large sizes for increased viewing distances: 32m, 48m, 60m.
- Two installation wall brackets available.
- 5 Year Warranty.
- Designed and Manufactured in Australia.

TECHNICAL INFORMATION




- Operating mode: Maintained
- Nominal Input Voltage: 230 - 240 V a.c. 50 Hz
- Power consumption: 4.5 W
- Battery: Li-ion 6.4 V, 1.5 Ah
- Operating Temperature: 10° C to 40° C
- Body Construction: White powder coated Zinc Steel
- Diffuser Construction: Injection Moulded Acrylic
- Compliance : AS/NZS 2293, AS/NZS 60598 

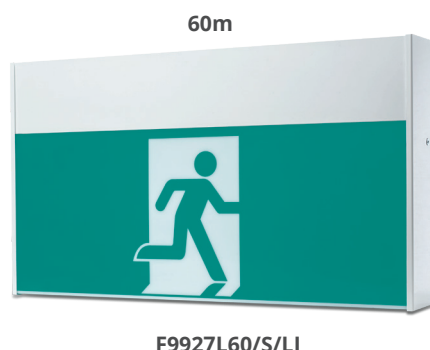



Jumbo LED Exit Signs





DIMENSIONS

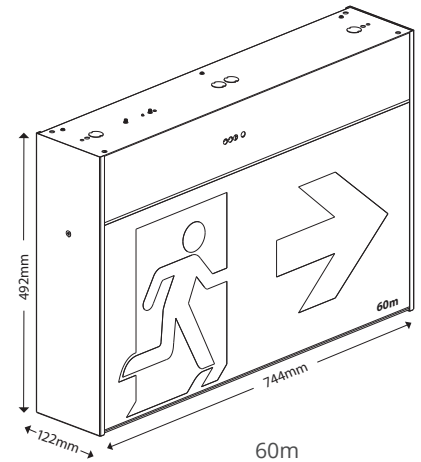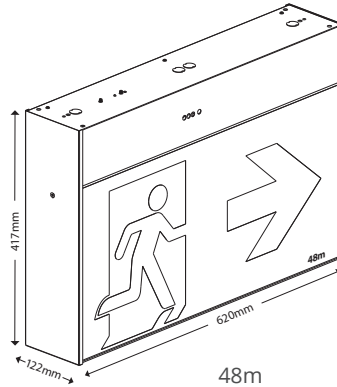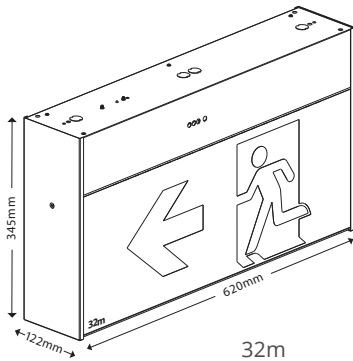

WALL BRACKET ACCESSORY

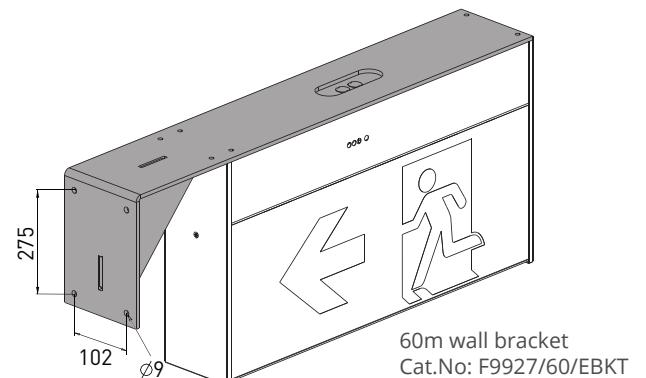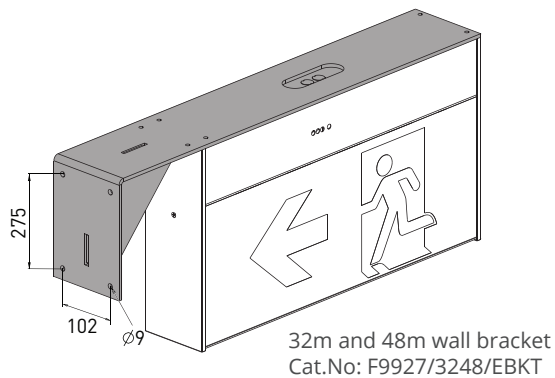

WALL BRACKET FLUSH ACCESSORY

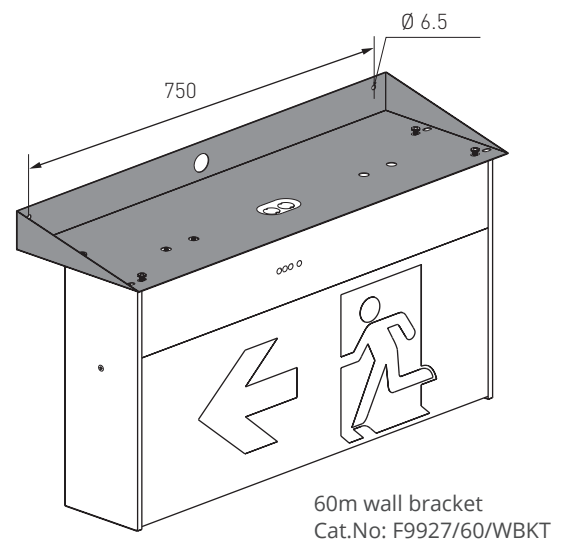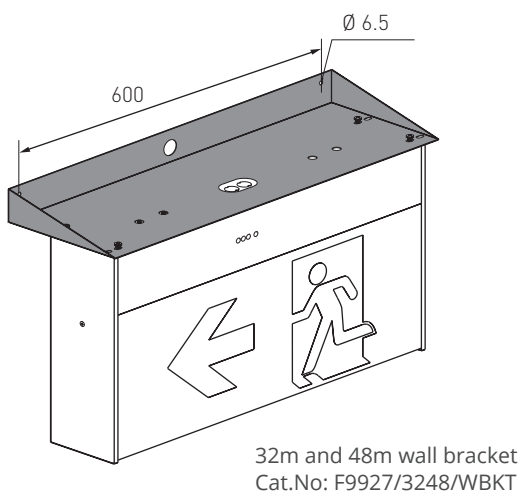

Note: All dimensions are in mm.

Jumbo LED Exit Signs

Cat. No.	Description	Weight
32m		
F9927L32/S/LI	JUM LED EXIT 32M SS RM LI	4.8KG
F9927L32/L/LI	JUM LED EXIT 32M SS RML LI	4.8KG
F9927L32/R/LI	JUM LED EXIT 32M SS RMR LI	4.8KG
F9927L32/DSS/LI	JUM LED EXIT 32M DS RM LI	4.8KG
F9927L32/DLR/LI	JUM LED EXIT 32M DS RMLR LI	4.8KG
FX9927L32/S/LI	JUM LED EXIT 32M MASTERMINDER SS RM LI	4.8KG
FX9927L32/L/LI	JUM LED EXIT 32M MASTERMINDER SS RML LI	4.8KG
FX9927L32/R/LI	JUM LED EXIT 32M MASTERMINDER SS RMR LI	4.8KG
FX9927L32DSS/LI	JUM LED EXIT 32M MASTERMINDER DS RM LI	4.8KG
FX9927L32DLR/LI	JUM LED EXIT 32M MASTERMINDER DS RMLR LI	4.8KG
48m		
F9927L48/S/LI	JUM LED EXIT 48M SS RM LI	5.2KG
F9927L48/L/LI	JUM LED EXIT 48M SS RML LI	5.2KG
F9927L48/R/LI	JUM LED EXIT 48M SS RMR LI	5.2KG
F9927L48/DSS/LI	JUM LED EXIT 48M DS RM LI	5.2KG
F9927L48/DLR/LI	JUM LED EXIT 48M DS RMLR LI	5.2KG
FX9927L48/S/LI	JUM LED EXIT 48M MASTERMINDER SS RM LI	5.2KG
FX9927L48/L/LI	JUM LED EXIT 48M MASTERMINDER SS RML LI	5.2KG
FX9927L48/R/LI	JUM LED EXIT 48M MASTERMINDER SS RMR LI	5.2KG
FX9927L48DSS/LI	JUM LED EXIT 48M MASTERMINDER DS RM LI	5.2KG
FX9927L48DLR/LI	JUM LED EXIT 48M MASTERMINDER DS RMLR LI	5.2KG
60m		
F9927L60/S/LI	JUM LED EXIT 60M SS RM LI	6.9KG
F9927L60/L/LI	JUM LED EXIT 60M SS RML LI	6.9KG
F9927L60/R/LI	JUM LED EXIT 60M SS RMR LI	6.9KG
F9927L60/DSS/LI	JUM LED EXIT 60M DS RM LI	6.9KG
F9927L60/DLR/LI	JUM LED EXIT 60M DS RMLR LI	6.9KG
FX9927L60/S/LI	JUM LED EXIT 60M MASTERMINDER SS RM LI	6.9KG
FX9927L60/L/LI	JUM LED EXIT 60M MASTERMINDER SS RML LI	6.9KG
FX9927L60/R/LI	JUM LED EXIT 60M MASTERMINDER SS RMR LI	6.9KG
FX9927L60DSS/LI	JUM LED EXIT 60M MASTERMINDER DS RM LI	6.9KG
FX9927L60DLR/LI	JUM LED EXIT 60M MASTERMINDER DS RMLR LI	6.9KG

RM= Running Man straight, RML= Running Man left, RMR=Running Man right
RMLR= Running Man left/right, DS=Double Sided, SS=Single Sided

Accessories	
F9927/3248/EBKT	32/48M WALL BRACKET
F9927/60/EBKT	60M WALL BRACKET
F9927/3248/WBKT	32/48M WALL FLUSH BRACKET
F9927/60/WBKT	60M WALL FLUSH BRACKET

Classification	
32m	C ₀ : D12.5, C ₉₀ :D5
48m	C ₀ : D12.5, C ₉₀ :D4
60m	C ₀ : D12.5, C ₉₀ :D3.2

Spacing table: Maximum Spacing between luminaires for 0.2 lux (Australia)

Mounting Height (m)	2.4	2.7	3.0	3.3	5
D3.2	6.5	6.5	6.5	6.3	0.0*
D4	7.2	7.3	7.3	7.2	0.0*
D5	8.0	8.1	8.2	8.2	7.2
D10	10.5	10.8	11.0	11.2	11.5
D12.5	11.4	11.8	12.1	12.3	12.9

As per AS/NZS 2293:2018

Spacing table: Maximum Spacing between luminaires for 1.0 lux (New Zealand)

Mounting Height (m)	2.4	2.7	3.0	3.3	5
D3.2	0.0*	N/A	N/A	N/A	N/A
D4	0.0*	0.0*	N/A	N/A	N/A
D5	0.0*	0.0*	0.0*	N/A	N/A
D10	5.1	5.0	4.7	0.0*	N/A
D12.5	5.8	5.7	5.6	5.3	N/A

As per AS/NZS 2293:2018

* - exit sign satisfies the requirement to illuminate the doorway or potential hazard, however without a spacing for this mounting height as per AS/NZS 2293.1 clause 4.5.

N/A - exit sign without a spacing when installed at this mounting height.