## **Eco Rapid LED Site Guard**

## ECO RAPID





A complete range of non-maintained Emergency luminaires for commercial applications.

#### **FEATURES**

- Electronics designed to lengthen the life of the battery, minimizing maintenance costs.
- T-Sense temperature sensing technology for the Li-ion battery.
- Energy efficient LED lamp technology.
- Environment friendly battery.
- Easy to install
- 3 Year Warranty.
- Designed in Australia.

#### **APPLICATIONS**

- Loading Docks
- Small Gymnasiums
- Car Parks



#### **TECHNICAL INFORMATION**

■ Operating Mode: Non-Maintained

■ Nominal Input Voltage: 230-240V a.c. 50Hz

■ Power Consumption: 3W ■ Inrush Current: 4A peak

■ Battery: Li-ion 3.2V, 6.6 Ah

■ Lumen Output: 2x 180 lm

■ Light Source Life (LSL): 50,000 hours

■ Operating Temperature: 10°C to 40°C

■ IP Rating: IP65

■ IK Rating: IK07

■ Body and Diffuser Construction: Polycarbonate

Compliance: AS/NZS 2293, AS/NZS 60598



F9979/LI	Eco Rapid LED Site Guard
Accessories	
FL9930WG	Wire Guard - White

Description

Cat. No.


# **Eco Rapid LED Site Guard**

## ECO RAPID





#### **LUX PLOT**

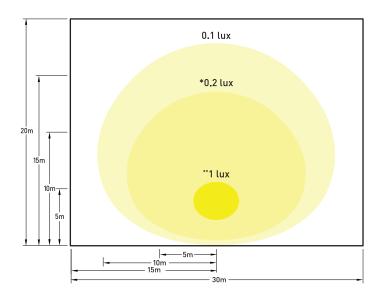


- Luminaire is mounted 5m above floor on one wall.
- Spotlights have a 90 degree tilt angle (straight out from fitting)
   A maintenance factor of 1.0 is applied to all luminaires.

- Illuminance measurements are at ground level.
  This design is to be used as a guide only and should not be used for compliance. A dedicated lighting design will need to be done for every application.

\*0.2 lux corresponding to Australian lighting standards.
\*\*1.0 lux corresponding to New Zealand lighting standards.

#### **DIMENSIONS**

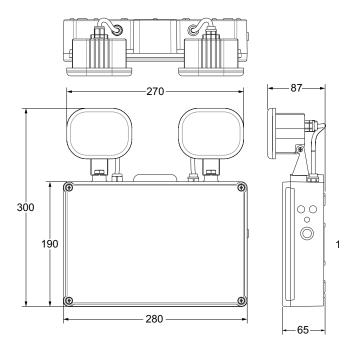

Note: All dimensions are in mm.

More info available at:

www.famco.com.au



T: (03) 9935 7300 F: (03) 9935 7301 E: info@famco.com.au W: www.famco.com.au





