

# **Eco Exit LED**



An extruded aluminum body exit sign with fast fit bracket for 24m viewing distance.

#### **APPLICATIONS**

- Warehouses
- Distribution centers
- Shopping malls
- Exhibition malls
- Sporting venues
- Universities
- Airports



- T-sense<sup>™</sup> temperature sensing technology for the Li-ion battery.
- Electronics designed to lengthen the life of the battery, minimizing maintenance costs.
- Environment friendly battery.
- Ceiling or Wall mounted.
- Robust construction.
- Two installation wall brackets available.
- 5 Year Warranty.
- Designed and Manufactured in Australia.

## **TECHNICAL INFORMATION**

■ Operating mode: Maintained.

■ Operating voltage: 230 - 240 V a.c. 50Hz.

■ Power consumption: 4.0W

■ Battery: Li-ion 6.4V, 1.5Ah.

■ Body construction: Zinc coated steel, white powder coating finish.

■ Diffuser construction: Acrylic.

■ Compliance: AS/NZS 2293, AS/NZS 60598 🙆 🕀





	1
	1
TANK FRANCE	
	- In same


	1
Cat. No.	Description
SPU	
F9920L/S/LI	ECO LED Exit SS RM LITHIUM
F9920L/L/LI	ECO LED Exit SS RML LITHIUM
F9920L/R/LI	ECO LED Exit SS RMR LITHIUM
F9920L/DSS/LI	ECO LED Exit DS RM LITHIUM
F9920L/DLR/LI	ECO LED Exit DS RMLR LITHIUM
MASTERMINDER	
FX9920L/S/LI	ECO LED Exit SS RM LITHIUM
FX9920L/L/LI	ECO LED Exit SS RML LITHIUM
FX9920L/R/LI	ECO LED Exit SS RMR LITHIUM
FX9920L/DSS/LI	ECO LED Exit DS RM LITHIUM
FX9920L/DLR/LI	ECO LED Exit DS RMLR LITHIUM
ACCESSORIES	
F9920ENDBKT/WH	L- BRACKET - MOUNT




# **Eco Exit LED**



### **DIMENSIONS**

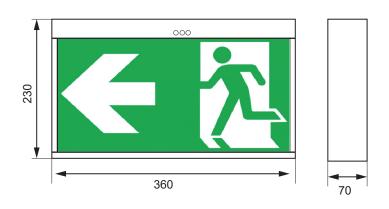



Classification			
C <sub>o</sub>	D10		
C <sub>90</sub>	E6.3		

## **SPACING TABLE**

Maximum spacing between luminaire for 0.2 lux. (Australia)

Mounting Height	2.4m	2.7m	3.0m	3.3m
D10	10.5	10.8	11.0	11.2
E6.3	7.4	7.9	8.2	8.5

As per AS/NZS 2293:2018

Maximum spacing between luminaire for 1.0 lux. (New Zealand)

Mounting Height	2.4m	2.7m	3.0m	3.3m
D10	5.1	5.0	4.7	0.0*
E6.3	4.1	0.0*	0.0*	0.0*

As per AS/NZS 2293:2018

 $\ensuremath{^*}$  - exit sign satisfies the requirement to illuminate the doorway or potential hazard, however without a spacing for this mounting height as per AS/NZS 2293.1:2018 clause 4.5.

More info available at: www.famco.com.au

Note: All dimensions are in mm.



written permission.